

Vacuum type leak detector Eurovac

3

Your benefits

- Leak detector class I, EN 13160-1/-2
- Modern housing design, in line with WATCHDOG-LINE alarm unit series
- Large supply voltage range (AC 100–240 V) for worldwide application
- With power outage monitoring (with optional 9 V battery)
- Indication of pump operating time
- Low-noise operation
- Electronic pressure sensor for permanently stable switching points
- Drilling template included – for easy and fast installation
- Relay output for additional signalling devices, additional alarm units, event reporting systems or for integration into building control systems



Eurovac in protective housing (IP 65) with heating and horn

EnOcean-ready

Can be combined with EnOcean® wireless module TCM 320 for integration into building automation systems.



Robust wall mounting housing with hole pattern – suitable for most standard vacuum type leak detectors




High energy efficiency: economical, powerful DC motor with high starting torque

Hose connection (Ø 4/6 mm) for the pneumatic connection to the interstitial space of the tanks

Connection measuring line

Connection exhaust line

Connection suction line

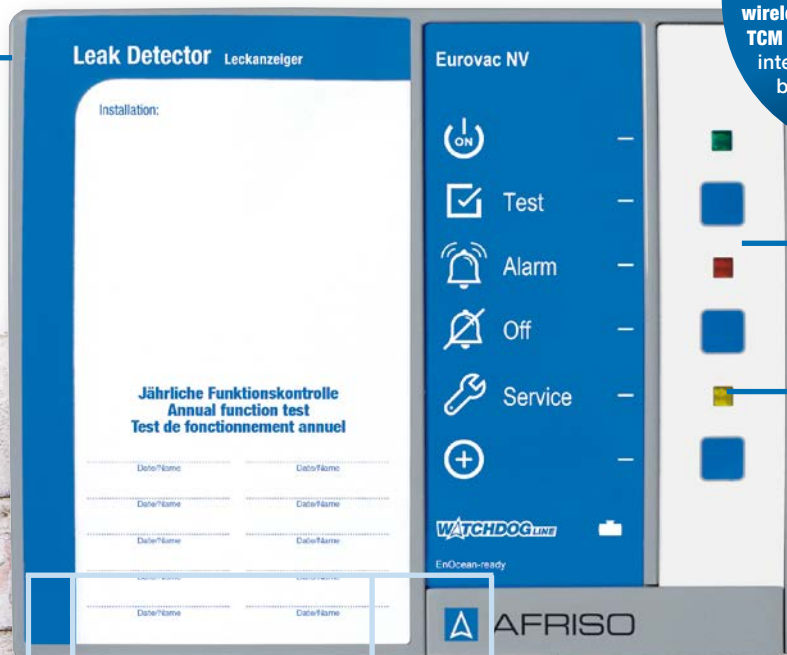

Control panel with visual/audible alarms and Acknowledge key

Service indicator for annual maintenance

Supply voltage

Sintered plastic filter and condensate trap to indicate the current degree of pollution and to protect the pump